


DL2 Roll Up Assembly Instructions

1



Remove your roll up and bungee pole from the carry bag.

2




Take the pole and allow all three sections to slide together.

3



Push the black plastic bracket onto the end of the pole.

4




Insert the pole into the cassette, ensuring that it is fully located.

5



Pull the first top rail straight upwards ensuring not to damage the graphic.

6




Hook the top rail onto the black plastic bracket. Repeat stage 5 and 6 for the second graphic.



DL2 Banner Graphic Specification

2150mm x 850mm

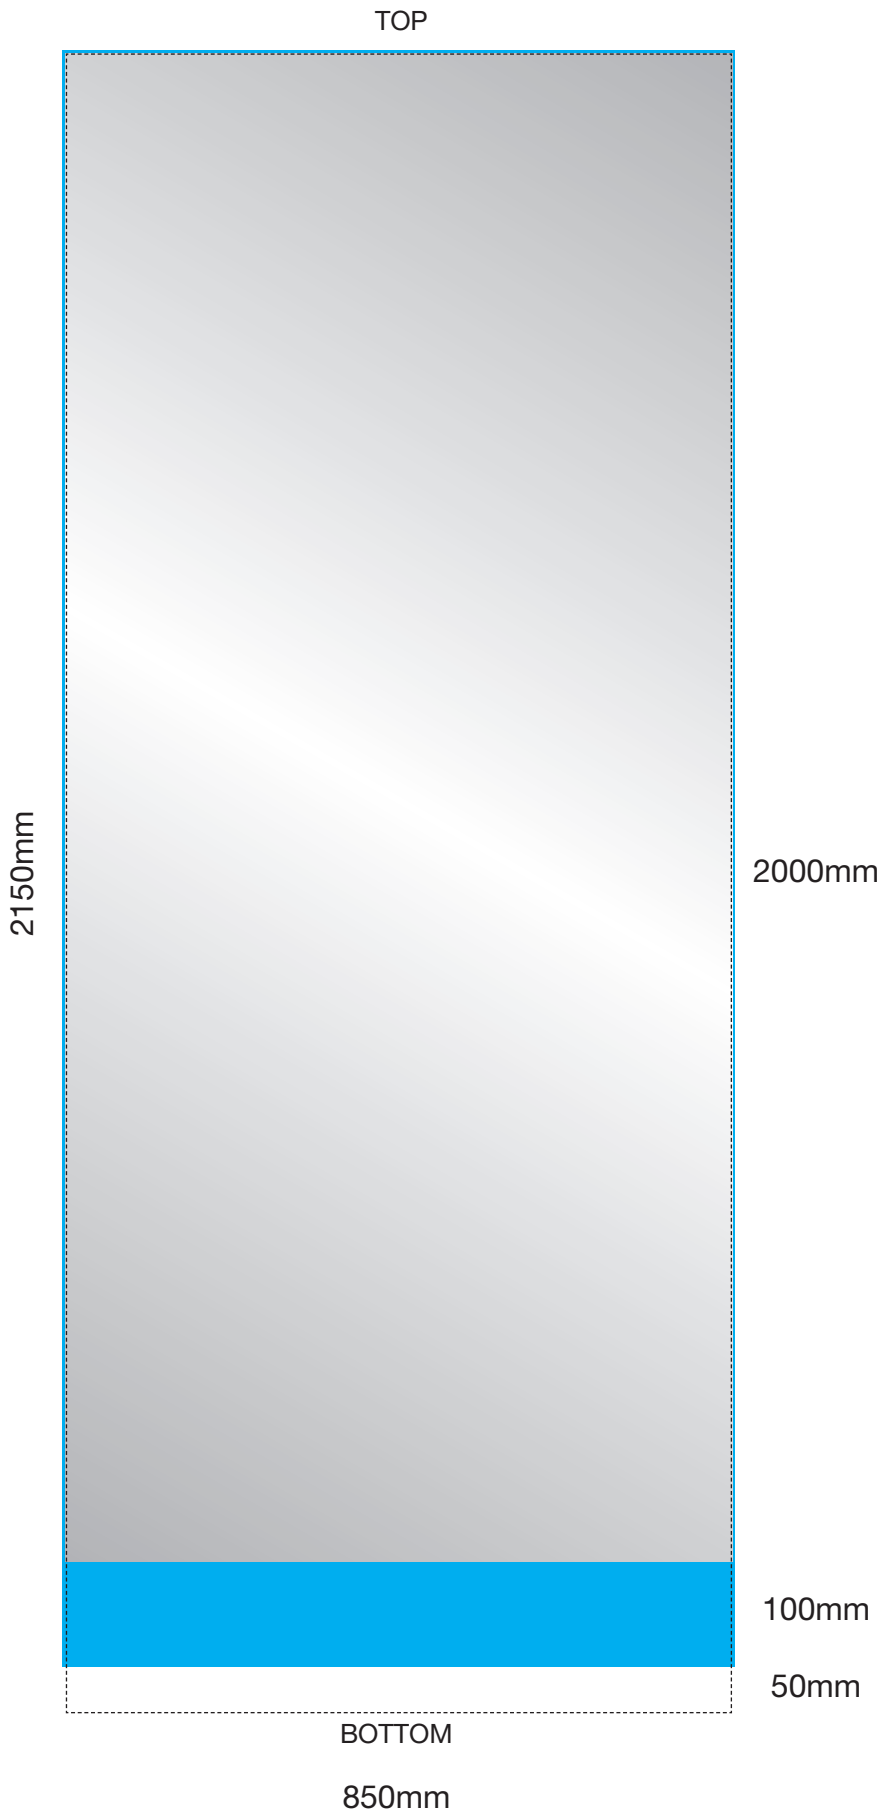

Visible graphic area 2000mm x 850mm

Finished print size 2150mm x 850mm
(Inc. 150mm inside base of cassette)

Image bleed area 2105 x 860mm
(5mm top and sides, 100mm inside base)

n.b. We recommend maximum graphic thickness including seal to be 375 micron for fitting within the cassette

